


LEAD FINISH: GOLD	
CASING FINISH: GOLD	
CAPACITANCE	100pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	5 AMP MAX.
WORKING VOLTAGE	125°C 115 VAC MAX. 125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	

FREQ. MHz	I.L. (db)
10	--
30	--
100	3
300	10
1 GHz	20
10 GHz	28




MARKING:  
 PART: GREEN DOT  
 BAG:  
 SCIF-9920-101  
 DATE CODE  
 QTY./BAG (100 MAX.)

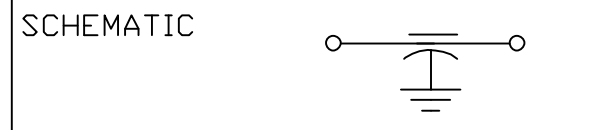

- NOTES:  
 1. SUGGESTED MOUNTING HOLE =  $\phi.132 \pm .002$   
 2. MAX SOLDERING TEMP: 235°C FOR 5 SECONDS MAX  
 3. THIS IS A LEAD FREE PRODUCT.



CN 53287-ENG 01	CN 53253-ENG 00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	FAIRVIEW PENNSYLVANIA Dwn. KAUFFMAN Date 2-22-10 Engr. CHERESON Scale NONE	Description
			Fractions $\pm 1/64$ Dec. $.xx \pm .03$ Dec. $.xxx \pm .005$ Angles $\pm 0^\circ 30'$ CODE IDENT. NO. DLSP2			
CHANGE NOTICE						SCIF-9920-101