


NOTE:

- SUGGESTED MTG. HOLE ϕ .160
- THIS IS A LEAD FREE PRODUCT
- MAX. REFLOW IS 245° FOR 5 SEC.

01

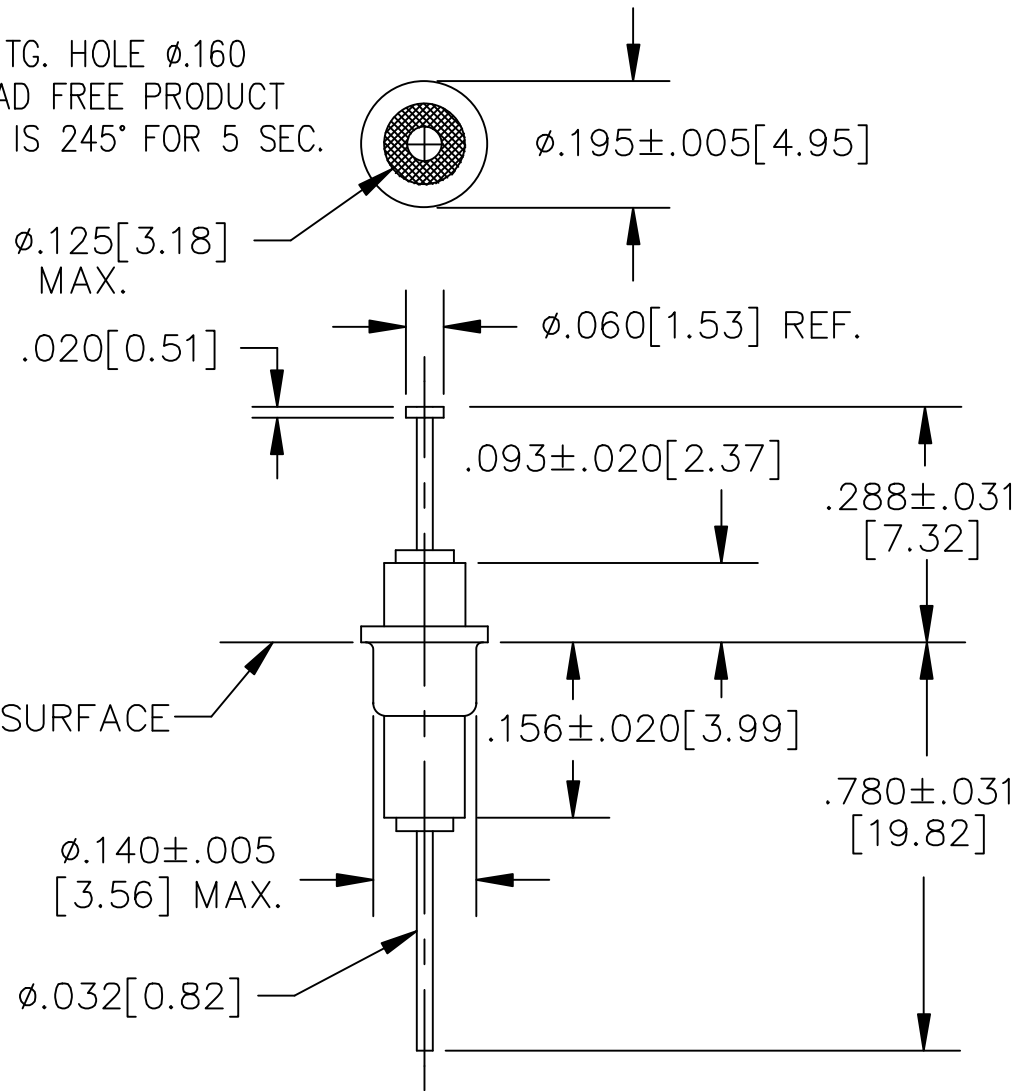

01


LEAD FINISH:	TIN/SILVER
CAPACITANCE	1750pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C: 250 VDC 125°C: 200 VDC

D.C.R.=.01 Ohms MAX.

I.L. PER MIL-STD-220

FREQ. MHz	I.L. (db)
10	5
50	N/A
100	50
500	N/A
1 GHz	60


SCHEMATIC

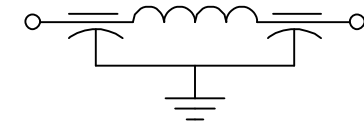

MARKING:

PART: NONE
 BAG:
 1214F-001
 DATE CODE
 QTY./BAG (200 MAX.)

					01	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
					CN 30481-CPD	CN 17021-CPD	CHANGE NOTICE	Fractions ± 1/64
								Dec. .xx±
								Dec. .xxx± .015
								Angles ±0° 30'
								CODE IDENT. NO. OLSP2



SPECTRUM CONTROL INC.

FAIRVIEW
 PENNSYLVANIA

Dwn. KAUFFMAN
 Date 09-18-06
 Engr GRUNAUER
 Scale N.T.S.

Description
 SOLDER-IN FILTER
 1214F-001