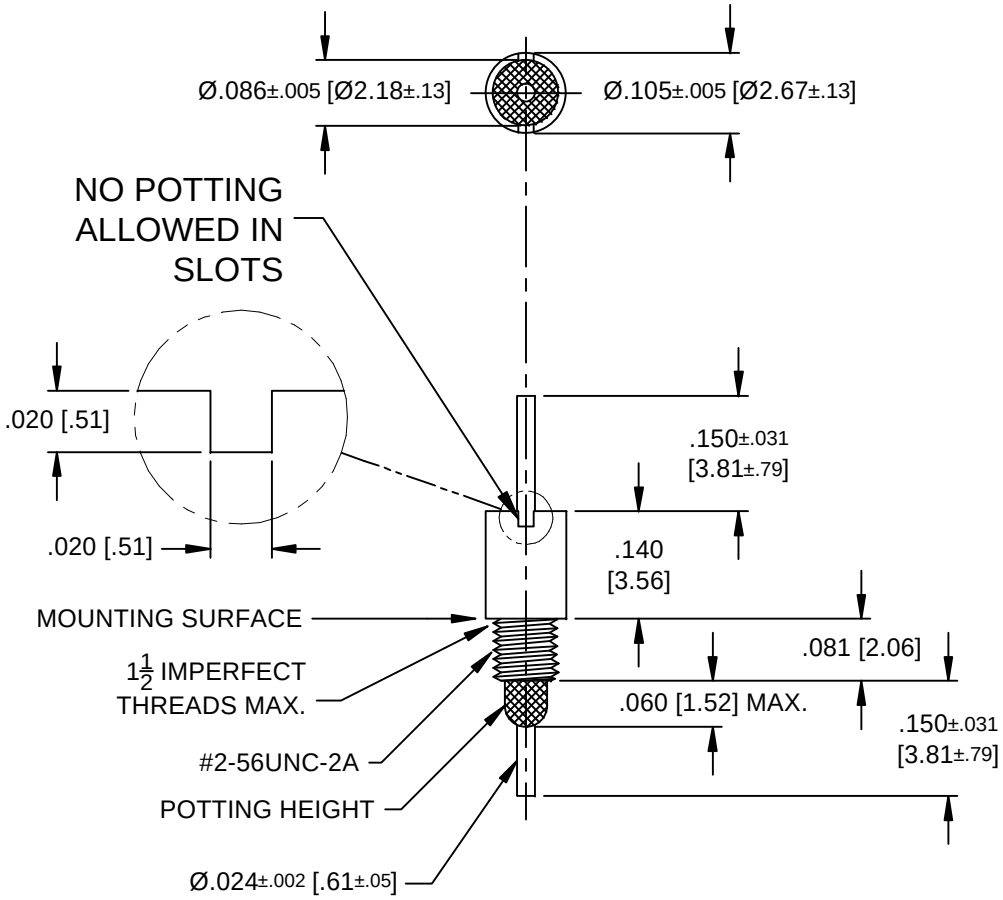

BUSHING FINISH	GOLD PL.
LEAD FINISH	GOLD PL.
CAPACITANCE	1000 pF +50% / -20%
TEMP. RANGE	-55°C TO +125°C
CURRENT	5 AMP
WORKING VOLTAGE	125°C 50 VDC
D.C. RESISTANCE	.005 Ohms MAX.
SCHEMATIC	

MARKING:

PART: NONE

PACKING: SCI
54-874-014
DATE CODE
LOT NO.
QTY./ BAG (200 MAX)

NOTES:
1. HARDWARE NOT SUPPLIED

10

RoHS compliant

REV NO	CHANGE NOTICE
10	CN 70340-ENG
09	CN 67661-ENG
08	CN 51809-ENG
07	CN 43605-ENG
06	CN 34261-CPD REDRAWN
05	CN 208554
04	CN 204162
03	CN 191533
02	CN 190458
01	CN 186572
00	CN 184432

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MILLIMETERS]

DO NOT SCALE

THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED
DECIMAL .X ±
DECIMAL .XX ±
DECIMAL .XXX±.010[.254]
ANGLES ± 0° 30'

CODE IDENT. NUMBER 0LSP2

api technologies corp. FAIRVIEW PENNSYLVANIA

DWN. P. Wells
DATE 9-26-13
ENGR. B. Devine
SHEET 1 OF 1

Description FEED THRU FILTER

54-874-014

Quality Products From The Specialists In Electro—Magnetic Compatibility