

# C1632X7R1A225M115AC

TDK Item Description : C1632X7R1A225MT\*\*\*\*



## Application & Main Feature

Commercial Grade ( Low ESL Reverse Geometry )

## Series

C1632 [EIA CC0612]



## Dimensions

L 1.60mm +/-0.2mm  
 W 3.20mm +/-0.2mm  
 T 1.15mm +/-0.15mm  
 B 0.20mm Min.

## Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

## Rated Voltage

1A (10Vdc)

## Capacitance

2.2uF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

5% Max.


## Insulation Resistance

45Mohm Min.


## AEC-Q200

Not Applicable


## |Z|, ESR vs. Freq. Characteristics

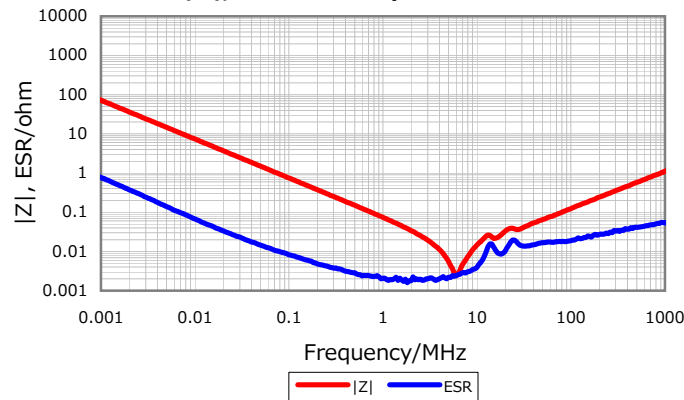


## Cap. vs. Freq. Characteristic

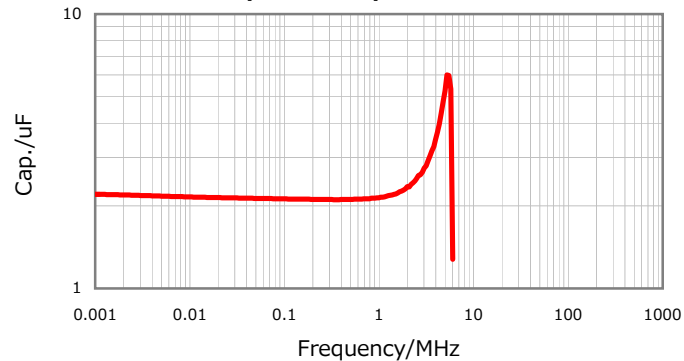


## DC Bias Characteristic

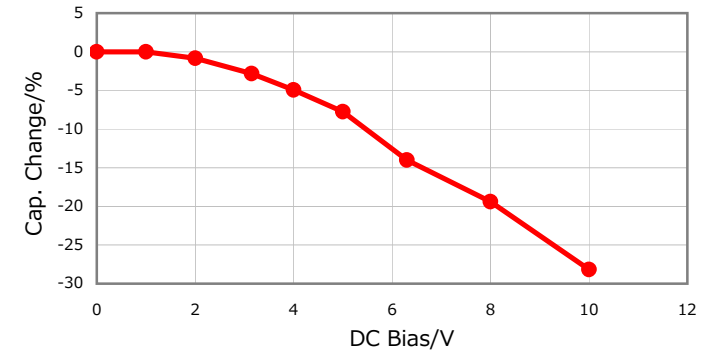

## Temperature Characteristics

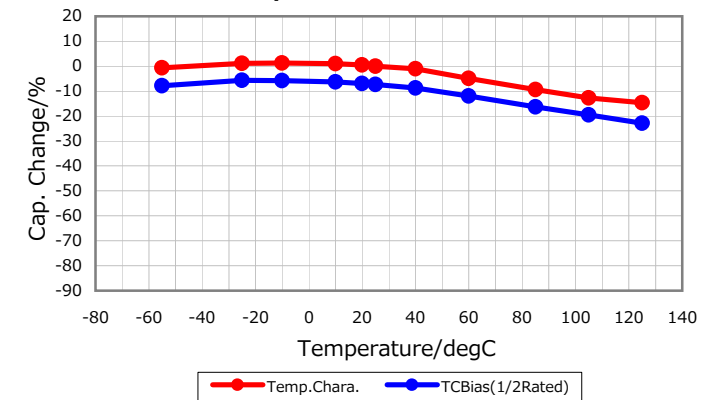

## Ripple Temperature Rise Characteristics

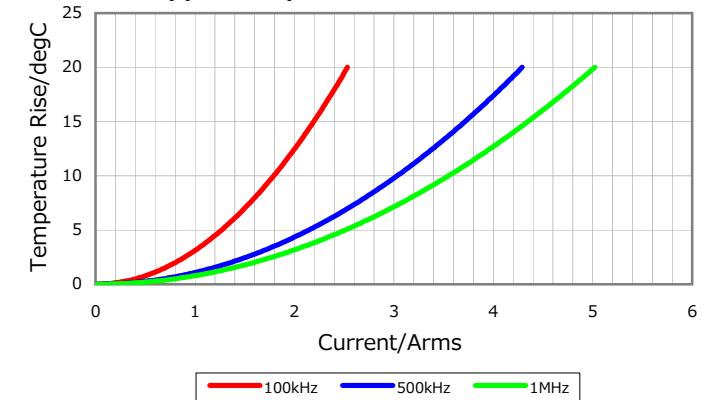

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

January 3, 2016