



IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	138 Ω	259 Ω	398 Ω
Minimum	- Ω	207 Ω	- Ω

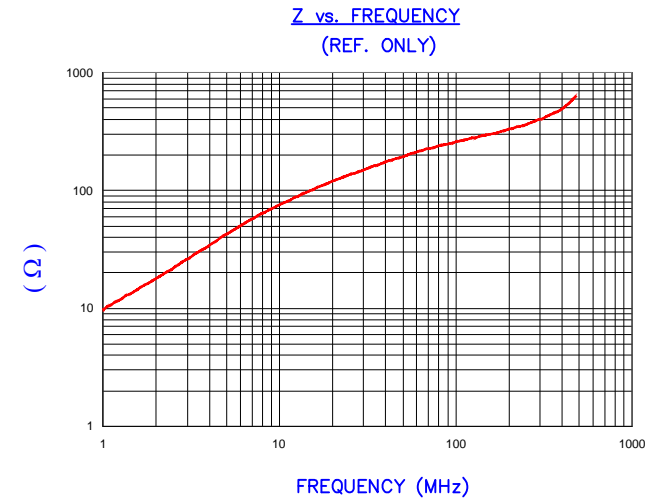

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture

**UNCONTROLLED
DOCUMENT**



DETAIL "A"
SCALE: 6:1
TYPICAL


FERRITE CORE DIMENSIONS (SPEC): mm/inches

A	11.96 [.471]	±	0.20 [.008]
B	5.53 [.218]	±	0.20 [.008]
C	25.62 [1.001]	±	0.20 [.008]

WEIGHT/1000 10.99 kgs 24.22 lbs

NOTES:

- PARTS MUST BE TUMBLED, BURNISHED OR DEBURRED TO REMOVE ALL BURRS AND SHARP EDGES.

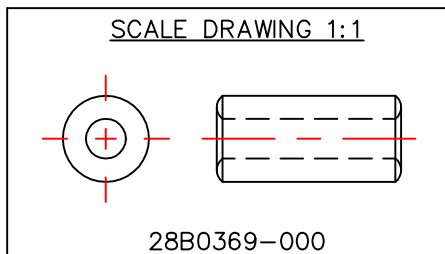

DIMENSIONS ARE IN MM [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
REV	DESCRIPTION	DATE	INT					
C	UPDATED COMPANY LOGO	08/28/14	QIU	PROJECT/PART NUMBER: 28B0369-000		REV C	PART TYPE: FERRITE CORE	DRAWN BY: TMB
B	ADD Z SPECS AND CURVE	08/12/08	JRK	DATE: 04/30/08	SCALE: 2 : 1	MATERIAL: FERRITE		
A	ORIGINAL DRAFT	04/30/08	TMB	CAD # 28B0369-000-C	TOOL # B0369			
REV	DESCRIPTION	DATE	INT					