
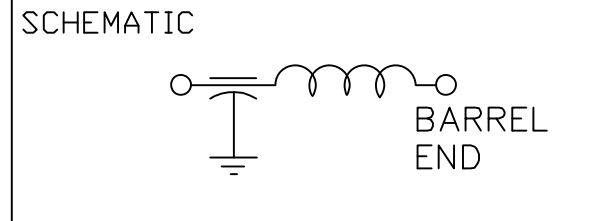


LEAD FINISH: GOLD PL.	
CASING FINISH: GOLD PL.	
CAPACITANCE	33nF MIN.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C -- VAC MAX. 125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	13
10	35
100	55
1 GHz	75
10 GHz	75



NOTES:
1. SUGGESTED MOUNTING HOLE = $\phi.130$

MARKING:
PART: 2 RED COLOR DOTS
BAG:
SCI-9980-333
DATE CODE
LOT NO.
QTY/BAG (200 MAX.)

CN 53133-ENG	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	FAIRVIEW PENNSYLVANIA	
	CHANGE NOTICE	Fractions $\pm 1/64$	Dwn. KAUFFMAN			Description
		Dec. .xx±	Date 2-25-10			FEEDTHRU FILTER
		Dec. .xxx±.005	Engr. B. DEVINE			SCI-9980-333
		Angles $\pm 0^{\circ} 30'$	Scale NONE			
		CODE IDENT. NO. DLSP2				